


# Temperature Sensor 7131

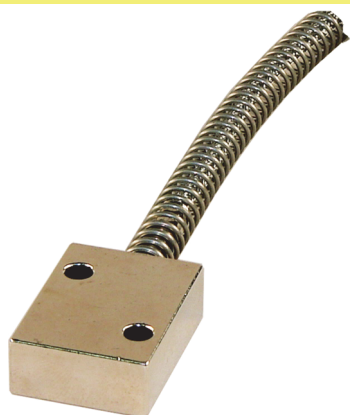

## Ordering code

1. 2. 3. 4. 5. 6.  
 -  -  -  -  -

<b>1. Measuring element</b>	7131	Pt100 class B
<b>2. Number of elements</b>	1	
	2	
<b>3. Connection type</b>	2L	2-wire (standard)
	3L	3-wire
	4L	4-wire
<b>4. Cable length (please state in clear text)</b>	2000	cable length in mm standard
	XXXX	custom length in mm; price/m
<b>5. Operating temperature</b>	400°C	fiberglass insulation

## Characteristics

- Thermocouple Fe-CuNi (type J); NiCr-Ni (type K)
- RTD Pt100, class B
- Surface sensor
- Sensor case brass nickel plated
- Cable type flexible fiberglass insulation with steel wire braiding or Teflon-Silicon-insulation

## Stock

7131-1-2L-2000-400°C

## Dimensions

