


SUITABLE PT1000 SENSOR (2-WIRE)

-70 °C
+250 °C

GOF 175-BNC

Item No. 607163
Surface probe for solid surfaces
-70 .. + 250 °C, Pt1000 class B

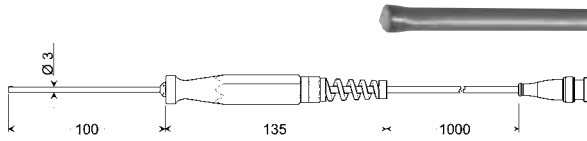


Front-side Pt1000 ceramic plate 2 x 2.3 mm, V4A sensor tube at the front 3 x 3 mm square, plastic handle, anti-kink screw connection, 1 m highly flexible silicone cable, BNC plug

Response time T_{90} : approx. 15 s

-70 °C
+120 °C

GOF 175 Mini-BNC

Item No. 610399
Surface probe for solid surfaces
-70 .. + 120 °C, Pt1000 class B

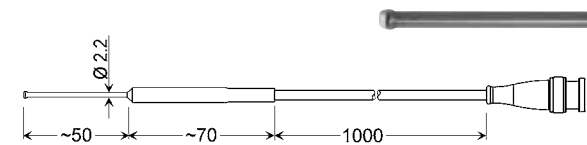


Pt1000 ceramic plate on the face, 2 x 2.3 mm, V4A tube \varnothing 2.2 mm, 1 m highly flexible silicone cable, BNC plug

Response time T_{90} : approx. 15 s

-70 °C
+250 °C

GGF 175-BNC

Item No. 610397
Probe for deep-frozen products
-70 .. + 250 °C, Pt1000 class B

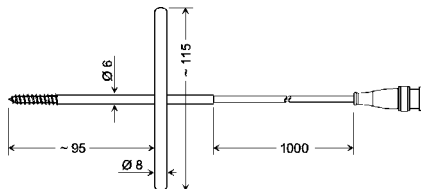


For screwing into frozen food, etc. without pre-drilling, V4A pipe \varnothing 6 mm with screw tip, 1 m highly flexible silicone cable, BNC plug

Response time T_{90} : approx. 15 s

-50 °C
+200 °C

GTF 2000-BNC

Item No. 607164
Air- / tube mounting probe
-50 .. + 200 °C, Pt1000 class B

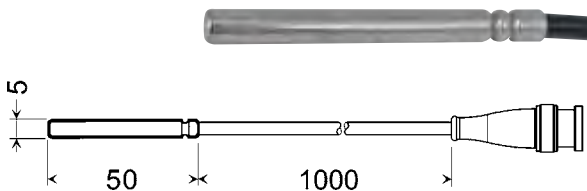

V4A sensor sleeve \varnothing 5 mm, 1 m highly flexible silicone cable, BNC plug, every additional meter or part thereof surcharge: € 3.20

Response time T_{90} : Water 0.4 m/s < 10 s, air 2 m/s approx. 60 s

VARIANT:

GTF 2000-BNC-WD

Item No. 476007
Watertight design, sensor design as above, but cable made of PVC and sensor tube shrink-wrapped in a watertight manner. Max. 105 °C!



HIGHLIGHTS:

- Lightweight, handy handle with optimized ergonomics and flexible cable
- Water-resistant: can be completely submerged
- Temporary temperature resistance up to 250 °C


-70 °C
+250 °C

GF 1T-T3-B-BNC

Item No. 609549
compact Pt1000 handheld sensor with silicone handle
-70 .. + 250 °C, Pt1000 class B

GF 1T-T3-AA-BNC

Item No. 609550
compact Pt1000 handheld sensor with silicone handle
-70 .. + 250 °C, Pt1000 class B

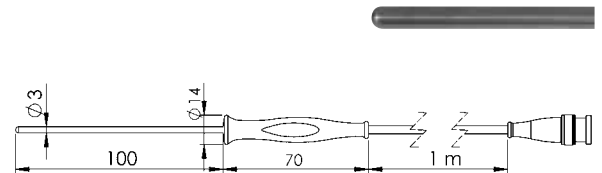

Immersion tip \varnothing 3 mm made of V4A tube, black silicone handle -50 .. + 250 °C, 1 m silicone cable -50 .. + 230 °C permanent / +250 °C 2 h, probe tip and silicone handle IP67, BNC connector

Response time T_{90} : Water 0.4 m/s < 2 s, air 2 m/s approx. 40 s

VARIANTS:

GF 1T-T3-B-LE

Item No. 609547
Pt1000 handheld sensor, Pt1000 class B, with loose ends

GF 1T-T3-AA-LE

Item No. 609548
Precision Pt1000 handheld sensor, Pt1000 Kl. AA, with loose ends

-200 °C
+250 °C

GF 1T-T3-B-BNC-MB4

Item No. 611763
Pt1000 handheld sensor for low temperatures, -200 .. + 250 °C, Pt1000 class B