


TYPE K MEASURING PROBE (NICR-NI) WITH MINI FLAT PLUG

-65 °C
+400 °C

GTE 130 OK
Item No. 601483
Insertion probe, without cable
-65 .. + 400 °C

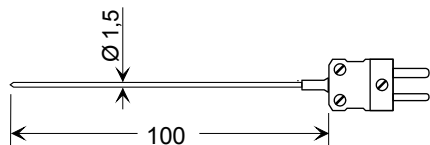


Interchangeable probe without cable, for soft plastic media
Spring-loaded V4A tube with Ø 1.5 mm slim insertion tip,
mini flat plug rigidly connected

Response time T_{90} : Water 0.4 m/s < 1 s

-200 °C
+1150 °C

GTT-15-150
Item No. 607552
Sheathed thermocouple type K (NiCr-Ni), Immersion probe
-200 .. + 1150 °C

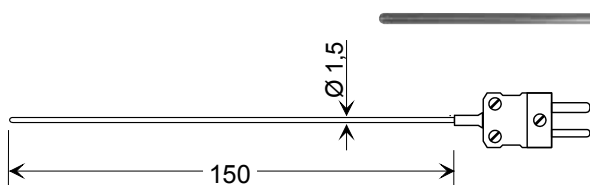


for air, gases, liquids
Sheathed thermocouple with Inconel 600 sheathed tube Ø 1.5 mm, bendable,
mini flat plug rigidly connected

Response time T_{90} : Water 0.4 m/s approx. 3 s

+50 °C
+1550 °C

GBF 1550
Item No. 603037
Bunsen burner probe type S
+50 .. + 1550 °C

FOR HIGH TEMPERATURES Request daily rate

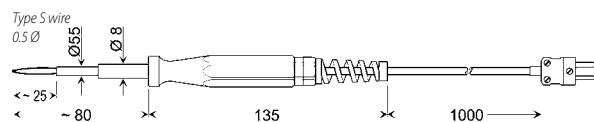


The tip of the probe may be held directly in the flame. V4A pipe Ø 8 mm,
with stepped ceramic pipe Ø 5.5 mm, plastic handle, silicone cable, mini flat plug

Response time T_{90} : approx. 2 s

-65 °C
+550 °C

GF 1TK-T3
Item No. 609695
compact type K hand probe with silicone handle, Ø 3 mm immersion probe
-65 .. + 550 °C, type K, class 1

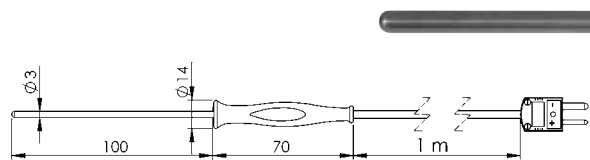

Immersion tip Ø 3 mm made of V4A tube, black silicone handle -50 .. + 250 °C,
1 m silicone cable -50 .. + 200 °C, sensor tip and silicone handle IP67,
mini flat plug

Response time T_{90} : Water 0.4 m/s < 2 s, air 2 m/s approx. 40 s


VARIANT:

GF 1TK-T3-LE

Item No. 609696
compact type K hand probe with silicone handle with loose ends

-65 °C
+550 °C

GF 1TK-E3
Item No. 609697
compact type K hand probe with silicone handle,
Ø 3 mm penetration probe
-65 .. + 550 °C, type K, class 1

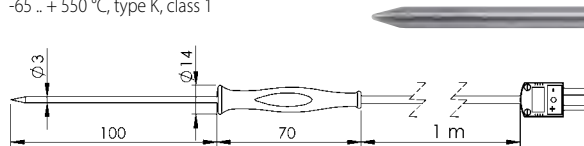

Insertion tip Ø 3 mm made of V4A tube, black silicone handle -50 .. + 250 °C,
1 m silicone cable -50 .. + 200 °C, probe tip and silicone handle IP67,
mini flat plug

Response time T_{90} : Water 0.4 m/s < 2 s, air 2 m/s approx. 40 s


VARIANT:

GF 1TK-E3-LE

Item No. 609698
compact type K hand probe with silicone handle with loose ends

-65 °C
+550 °C

GF 1TK-E1.5
Item No. 609699
compact type K hand probe with silicone handle,
Ø 1,5 mm extra thin penetration probe
-65 .. + 550 °C, type K, class 1

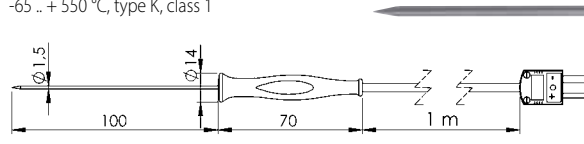

Insertion tip Ø 1,5 mm made of V4A tube, black silicone handle -50 .. + 250 °C,
1 m silicone cable -50 .. + 200 °C, probe tip and silicone handle IP67, mini flat plug

Response time T_{90} : Water 0.4 m/s < 1 s, air 2 m/s approx. 15 s


VARIANT:

GF 1TK-E1.5-LE

Item No. 609700
compact type K hand probe with silicone handle with loose ends

-65 °C
+400 °C

GF 1TK-L3
Item No. 611299
compact type K hand probe with silicone handle,
Ø 3 mm air sensor for clean media
-65 .. + 400 °C, type K, class 1

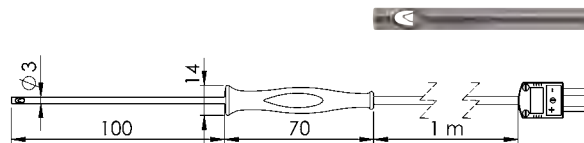

(use GF 1TK-T3 for dirty media), perforated V4A tube Ø 3 mm, measuring element
freely arranged, black silicone handle -50 .. + 250 °C,
1 m silicone cable -50 .. + 200 °C, mini flat plug

Response time T_{90} : Air 2 m/s approx. 15 s

VARIANT:

GF 1TK-L3-LE

Item No. 611300
compact type K hand probe with silicone handle with loose ends