


ACCESSORIES

CLAMPING RING SCREW CONNECTION  
GKV... STAINLESS STEEL

(for all probes without thread)

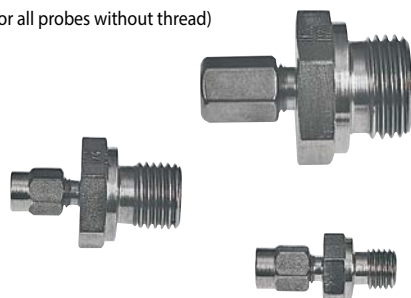

Type:	Outside thread	Clamp. ring-Ø (sensor tube-Ø)	Clamping ring
<b>GKV1</b> 602888	M8 x 1	1.5 mm	Teflon
<b>GKV2</b> 602889			Stainless steel
<b>GKV3</b> 602890		3.0 mm	Teflon
<b>GKV4</b> 602891			Stainless steel
<b>GKV5</b> 602892	G1/4"	1.5 mm	Teflon
<b>GKV6</b> 602893			Stainless steel
<b>GKV7</b> 602894		3.0 mm	Teflon
<b>GKV8</b> 602895			Stainless steel
<b>GKV11</b> 602898	G1/2"	6.0 mm	Teflon
<b>GKV12</b> 602899			Stainless steel
<b>GKV9</b> 602896		6.0 mm	Teflon
<b>GKV10</b> 602897			Stainless steel
<b>GKV13</b> 602900	G1/2"	8.0 mm	Teflon
<b>GKV14</b> 602901			Stainless steel
<b>GKV15</b> 602902		14.0 mm	Teflon
<b>GKV16</b> 602903	M10x1	6.0 mm	Stainless steel
<b>GKV-R12</b> 611175	R1/2	3.0 mm	Stainless steel

FLAT-PIN CONNECTIONS,  
FREE FROM THERMAL E.M.F.

(for type K, N, S)



**NST 1200-K**

Art. no. 602566

Flat-pin connections, free from thermal e.m.f., type K

**NST 1300-N**

Art. no. 605762

Flat-pin connections, free from thermal e.m.f., type N

**NST 1700-S**

Art. no. 603890

Flat-pin connections, free from thermal e.m.f., type S



**NKU 1200-K-O**

Art. no. 602738

U-coupling for installation in front panels (max. 120°C)



**NKU 1200-K**

Art. no. 602737

Flat-pin connections, free from thermal e.m.f., type K

**NKU 1300-N**

Art. no. 475808

2 pole miniature flat-pin socket, no thermo voltage free, Typ N (NiCrSi-NiSi)

**NKU 1700-S**


Art. no. 603535

Flat-pin connections, free from thermal e.m.f., type S

For higher temperatures use ceramic plug and coupling

IMMERSION SLEEVE OF STAINLESS STEEL

Immersion sleeve for probes without thread

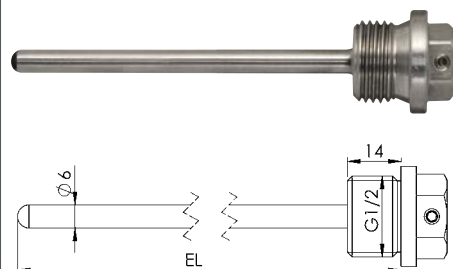

**EST01**


Art. no. 602868

Immersion sleeve with clamping for probes without thread for 100 mm

**Specifications:**

Thread: G1/2 (external thread)  
Outer diameter immersion sleeve: Ø 6 mm  
(for probes with outer diameter Ø 5 mm)  
length: L = 100 mm (suitable for e.g. GTF101 with FL = 105 mm, Ø 5 mm)  
Special lengths, diameters or threads upon request

Immersion sleeve for all probes with a G1/2"-thread

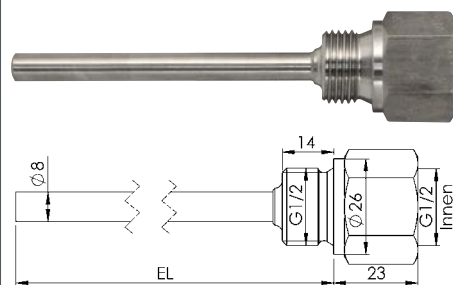

**EST02**

Art. no. 603362

Immersion sleeve for probe with G1/2 thread for 85 mm

**Specifications:**

Thread: G1/2 (internal/external)  
Outer diameter immersion sleeve: Ø 8 mm  
(for probes with outer diameter Ø 6 mm)  
L = 85 mm (suitable for e.g. GTF 103 with FL = 100 mm, Ø 6 mm)  
L = 100 mm (suitable for e.g. GTF 103 with FL = 115 mm, Ø 6 mm)  
Special lengths, diameters or threads upon request

**GWL10G**

Art. no. 603267

heat-conductive paste 10 g, in plastic gun, for faster heat exchange

Note: Handheld instrument probes can be found in chapter handheld instruments and the appropriate devices